



爱协林热处理多用炉 Heat Treatment Multi-purpose Chamber Furnace



数控立式磨床 CNC Vertical Milling Machine



数控立式磨床 CNC Vertical Milling Machine



枪炮钻 CNC Drilling Machine



数控立式车床 CNC Vertical Lathe



数控卧式磨床 CNC Horizontal Milling Machine



-190°超低温深冷设备
-190° Ultra Low-Temp Cryogenic Equipment



斗山斜轨数控车床 Doosan Inclined CNC Lathe



斗山卧式加工中心 Doosan Horizontal Machining Center



Zhengzhou Hanyun Construction Machinery Co., Ltd
Hydraulic breaker full industry chain production

Contact: jacky zhang WhatsApp/WeChat: +8619003835319

BOX TYPE SILENCED BREAKER




TOP TYPE BREAKER



SIDE TYPE BREAKER



BREAKER MAIN PARTS

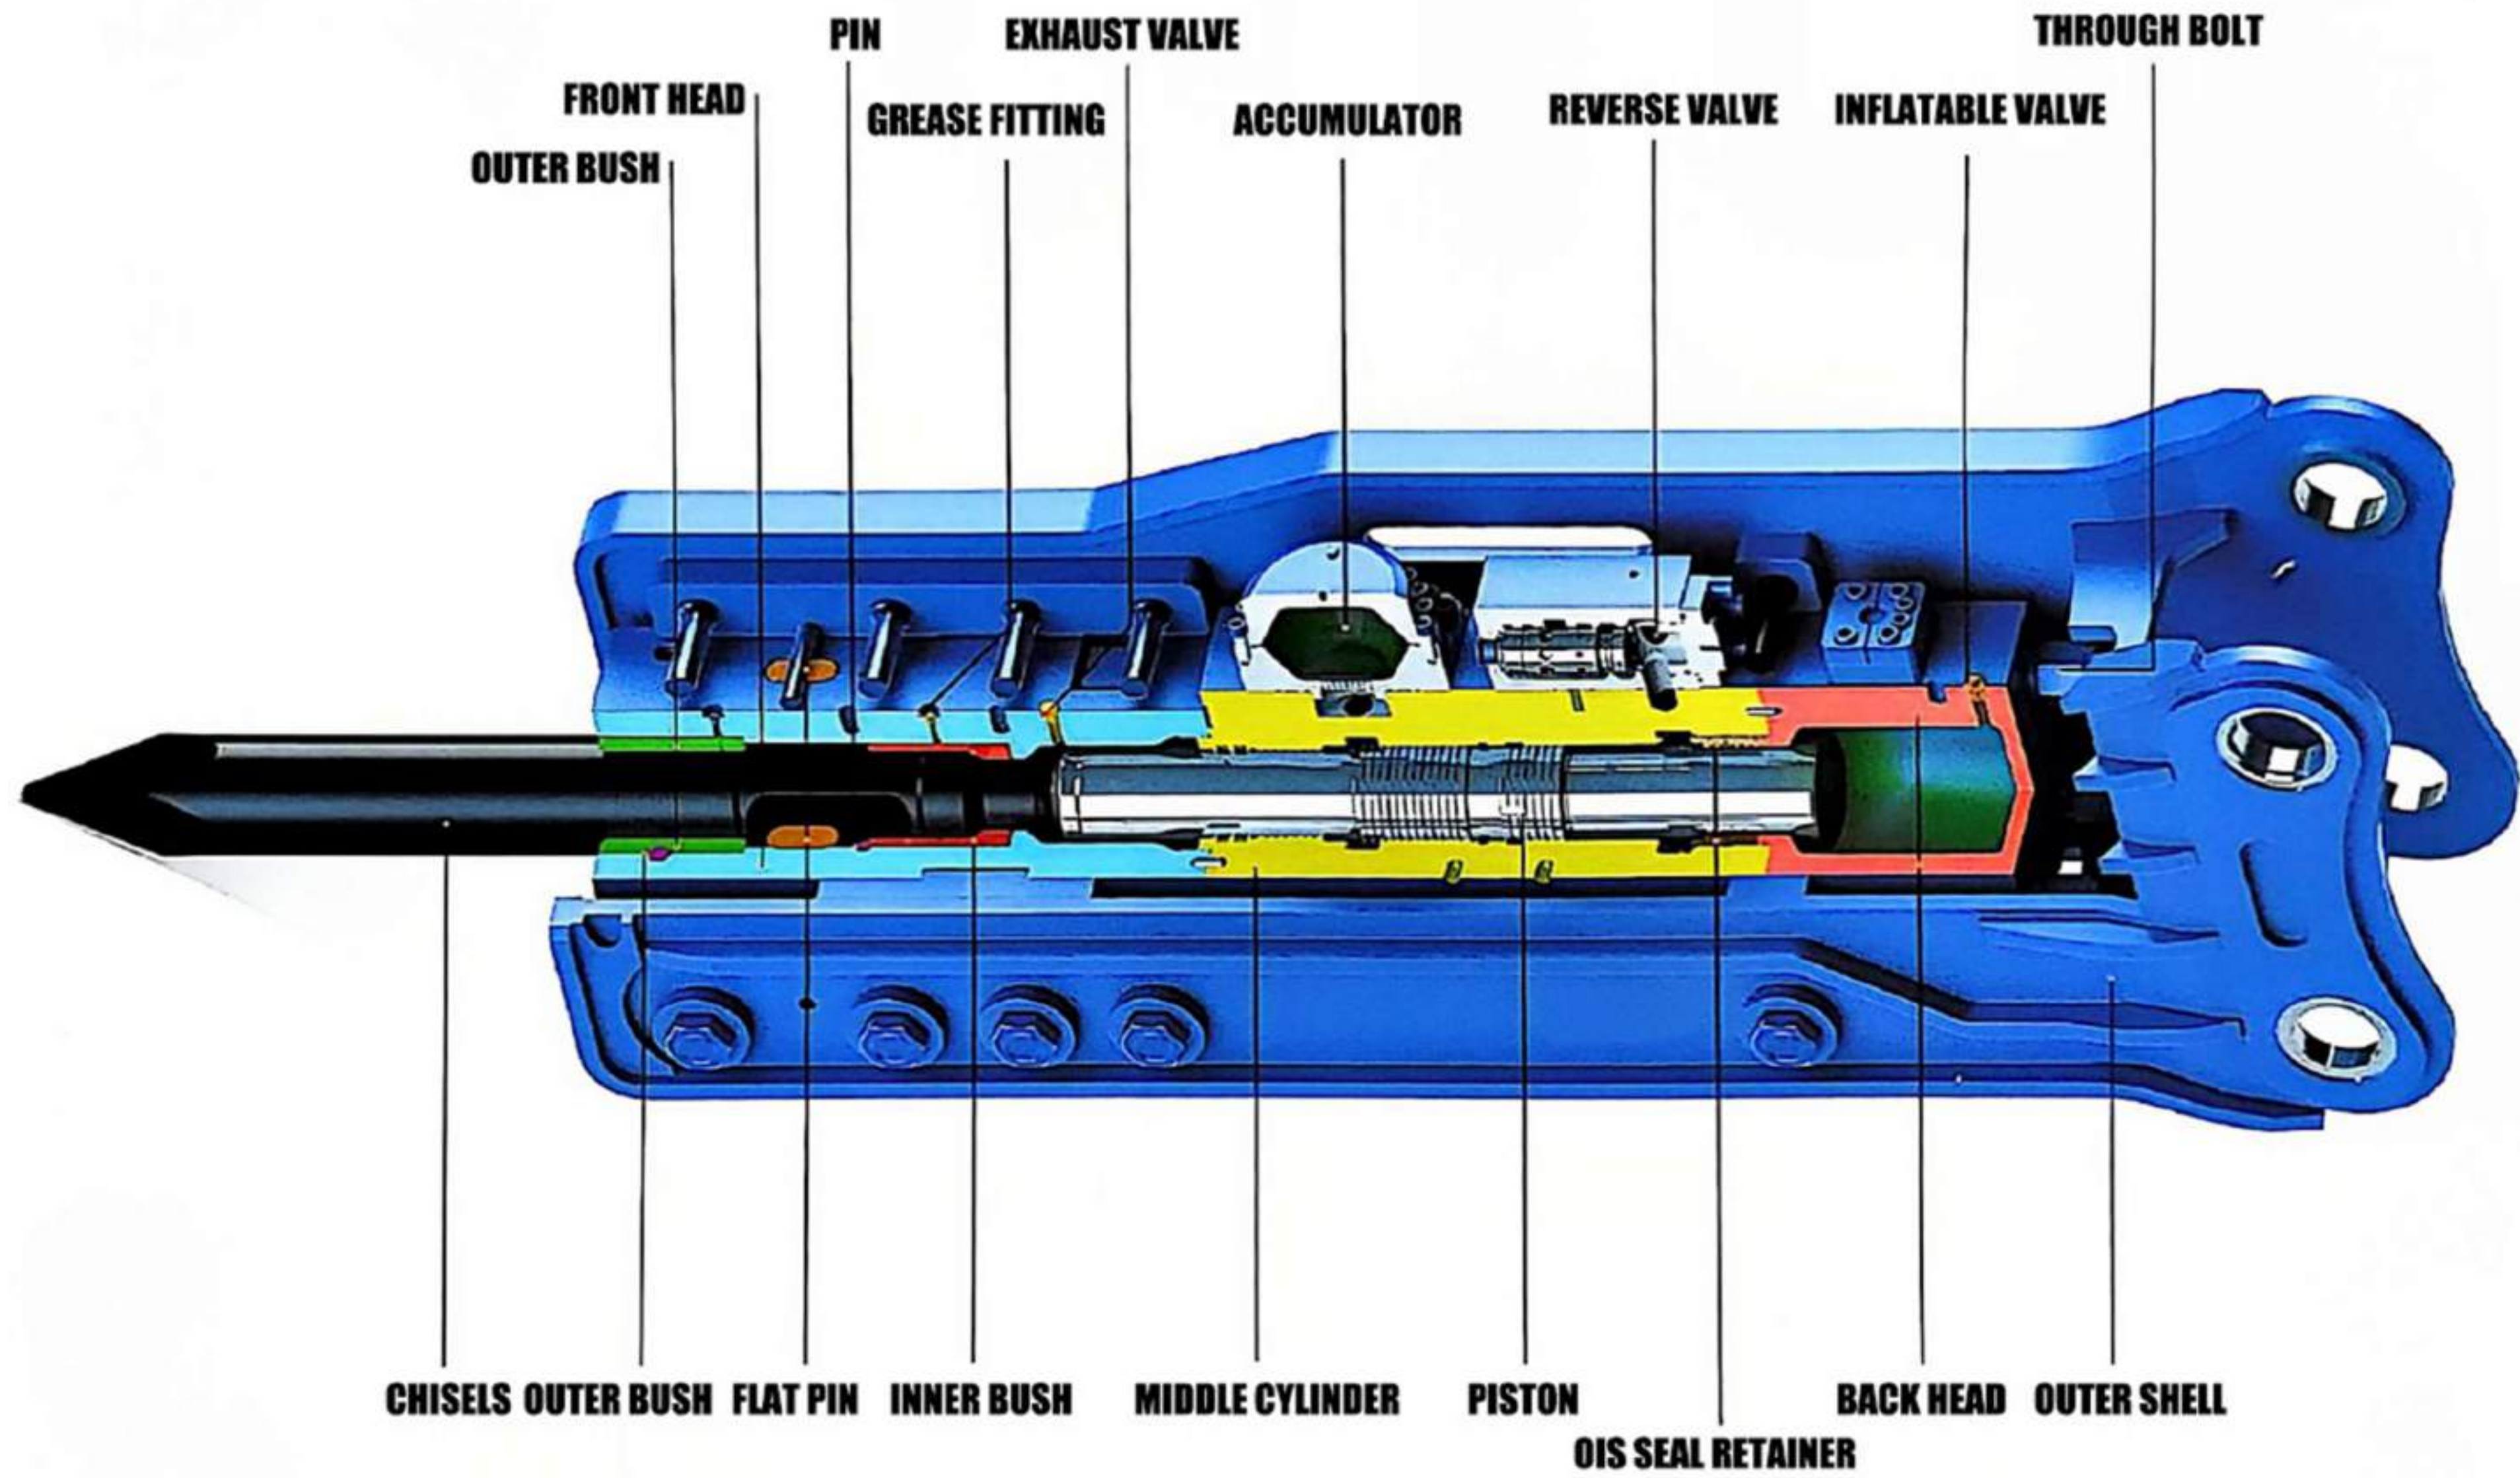

规格名称 SPECIFICATIONS		名称	HY400	HY450	HY530	HY680	HY750	HY850	HY1000	HY1200	HY1250	HY1350	HY1400
总重量 TOTAL WEIGHT	三角型 TRIANGULAR TYPE	kg	70	95	158	263	334	493	736	1374	1484	1653	1774
	直型 SIDE TOP	kg	72	95	158	343	409	591	880	1420	1587	1847	2059
	静音型 SLIENCE	kg	102	129	180	361	450	648	917	1358	1415	1893	2011
钎杆直径 DIAMETER OF TOOL		mm	40	45	53	68	75	85	100	120	125	135	140
钎杆重量 WEIGHT OF TOOL		kg	4	8	9	18	22	29	57	89	94	115	135
液压油压力 OPERATING PRESSURE		bar	90-120	90-120	90-120	110-140	120-150	130-160	150-170	150-170	150-170	160-180	160-180
液压油流量 HYDRAULIC FLOW RANGE		1/min	15-25	20-30	25-50	40-70	50-90	60-100	80-110	90-120	90-120	130-150	120-180
打击频率 IMPACT FREQUENCY		bpm	800-1400	700-1200	600-1100	500-900	400-800	400-800	350-700	350-650	350-650	400-600	350-500
配用车重 SUITABLE CARRIER		ton	0.8-2.5	1.2-3.0	2.5-4.5	4-7	6-9	7-14	10-15	15-18	15-18	18-26	18-26

规格名称 SPECIFICATIONS		名称	HY1500	HY1550	HY1600	HY1650A	HY1650B	HY1750	HY1850	HY1950	HY2000	HY2050	HY2100	HY2300
总重量 TOTAL WEIGHT	三角型 TRIANGULAR TYPE	kg	2281	2577	3075	2751	3277	3905	4365	4841	5800	6623	7300	8000
	直型 SIDE TOP	kg	2380	2745	3007	3156	3447	4057	4844	5374	--	--	--	--
	静音型 SLIENCE	kg	2457	2968	3300	3450	3700	4680	--	--	--	--	--	--
钎杆直径 DIAMETER OF TOOL		mm	150	155	160	165	165	175	185	195	200	205	210	230
钎杆重量 WEIGHT OF TOOL		kg	164	183	200	224	215	247	269	302	321	340	362	465
液压油压力 OPERATING PRESSURE		bar	160-180	160-180	160-180	160-180	170-200	260-270	270-280	270-280	270-280	270-280	280-290	280-290
液压油流量 HYDRAULIC FLOW RANGE		1/min	150-190	180-240	200-260	200-260	200-260	250-300	220-290	250-320	250-320	250-320	280-350	310-380
打击频率 IMPACT FREQUENCY		bpm	350-700	300-450	250-400	250-400	250-400	200-300	150-250	150-250	150-250	150-250	100-200	100-200
配用车重 SUITABLE CARRIER		ton	27-35	28-35	30-40	30-40	30-40	45-50	45-50	50-60	50-60	55-65	65-75	70-80



前缸体
Front Head



中缸总成
Cylinder Assy



氮气室
Back Head



换向阀
Valve



活塞
Piston



油封
Seal



活塞环
Oil Seal Retainer



蓄能器
Accumulator



皮碗
Diaphragm



氮气瓶
Gas Cylinder



氮气表
Gas Charging Kit



扁销
Tool Pin



外导向套
Outer Bush



内导向套
Inner Bush



通体螺栓
Through Bolt



壳体螺丝
Side Bolt



钎杆
Tool



管路
Pipeline



锤头管
Rubber Hose

破碎锤钎杆

High Quality Tools

破碎锤钎杆可以是标准的，也可以定做，用户可以决定破碎锤钎杆的长度、硬度和形状。
Standard chisels and customerized ones are both available. Chisels' length, hardness & type can be tailor-made to satisfy different clients' requirements.



尖头 Moil Point



这个工具是适当的破碎大块物料和混凝土。
Moil point goes through quickly. Used for breaking oversize objects and concrete.

铲头 Flat Wedge



这个工具是适用于特殊的破碎工作时。
Used for special breaking jobs, during which accurate breaking is not required.

球头 Blunt



拆迁工作，一般的拆除作业。
Used for most demolition jobs.

破碎锤钎杆 High Quality Tools

型号Model	40	45	53	68	70	75	85	100	125	135	140	150	155	165	175	190	195	200	205	210	230	255
项目Item	40	45	53	68	70	75	85	100	125	135	140	150	155	165	175	190	195	200	205	210	230	255
钎杆直径 Chisel Dia(ø)	40	45	53	68	70	75	85	100	125	135	140	150	155	165	175	190	195	200	205	210	230	255
长度 Length(mm)	450	500	600	700	700	750	850	1000	1200	1300	1300	1500	1500	1500	1600	1700	1700	1700	1800	1800	1800	1800

液压旋转抓木器 Rotary Hydraulic Grab					
型号 Model	单位 Unit	HY60	HY150	HY200	HY300
项目 Item					
外观尺寸 External dimension	mm	1415 × 630	1740 × 750	2440 × 1255	2480 × 1260
最大开口 Max. operating width	mm	1500	1710	2250	2300
抓取重量 Grasp weight	kg	1300	1400	2000	2500
旋转流量 Rotating oil flow	l/min	25-35	30-40	30-40	30-40
旋转压力 Rotating pressure	kg/cm ²	80-120	90-120	100-130	100-130
张合流量 Operating oil flow	l/min	30-50	80-140	100-150	100-150
张合压力 Operating pressure	kg/cm ²	160-220	180-220	180-220	180-220
重量 Weight	kg	360	850	1600	1800
适用挖机 Suitable excavator	ton	5-8	12-18	18-24	25-36



液压旋转抓木器
Rotary Hydraulic Grab



振动夯
Hydraulic Plate
Compactor



粉碎钳
Hydraulic Pulverizer

振动夯Hydraulic Plate Compactor

项目Item	型号Model	单位Unit	HY30	HY60	HY150	HY200	HY300
打击力 Striking power	ton		4	4	6.5	15	15
最大振动次数 Maximum number of vibrations	r/min		2000	2000	2000	2000	2000
使用油量 Fuel consumption	l/min		45-75	45-75	85-105	120-170	120-170
压力 Pressure	kg/cm²		100-130	100-130	100-130	150-200	150-200
重量 Weight	kg		200	300	500	900	950
打击面积 Striking area	mm		675×450	900×530	1030×670	1300×870	1350×870
总高 Total height	mm		670	700	860	990	1050
总宽 Total width	mm		790	530	670	870	870
适用挖机 Suitable excavator	ton		2-5	5-12	12-18	18-24	24-36

粉碎钳 Hydraulic Pulverizer

项目Item	型号Model	单位Unit	HY150	HY200	HY300	HY400
外观尺寸 External dimensions	mm		1870×1080×460	2460×1320×540	2550×1420×635	2590×1460×685
最大开口 Max.opening	mm		630	820	970	970
刀片长度 Suitable excavator	mm		160	160	160	160
流量 Flow	l/min		120-180	180-240	180-260	180-260
压力 Pressure	kg/cm²		220-280	280-320	280-320	280-320
重量 Weight	kg		1010	1750	2050	2250
头部破碎力 Head crushing force	ton		40	65	85	85
中部破碎力 Middle crushing force	ton		80	120	150	150
剪切次数 Number of cutting times	n/min		10-13	10-13	10-13	10-13
适用挖机 Suitable excavator	ton		12-18	20-28	26-36	32-40



莲花抓（旋转）
Orange Peel Grab (Rotary & Hydraulic)

莲花抓(旋转) Orange Peel Grab (Rotary & Hydraulic)					
型号 Model	单位 Unit	HY06	HY08	HY10	HY12
项目 Item					
最大开口 Max. opening	mm	2100	2300	2500	2750
张开高度 Opening height	mm	1595	1800	1900	1980
张开宽度 Opening width	mm	2320	2520	2750	3000
闭合宽度 Closing height	mm	1300	1480	1550	1650
闭合高度 Closing width	mm	1966	2150	2250	2416
最大压力 Max. pressure	kg/cm ²	260	260	260	260
最大流量 Max. oil flow	l/min	180-280	180-280	180-280	180-280
容量 Capacity	m3	0.6	0.8	1	1.2
产品自重 Weight	kg	1200	1760	1880	1980
适用机型 Suitable excavator	ton	12-18	18-24	24-36	36-40



快速连接器
Quick Coupler

快速连接器 Quick Coupler

项目Item	型号Model	单位Unit	HY60	HY80	HY150	HY200	HY300	HY400	HY500
总长度 Overall length	mm		565	600	780	1000	1070	1080	1120
总高度 Total height	mm		335	345	435	545	600	610	640
轴中心距 Pin to pin distance	mm		235-265	285-330	390-430	455-500	500-520	550-590	590
油缸伸缩距离 Cylinder expansion distance	mm		230-320	250-330	340-430	420-500	450-600	510-630	510-630
上下轴之间距离 Distance between upper and lower pins	mm		220	220	275	350	380	390	390
轴直径 Pin diameter	mm		45	50-55	60-65	70-80	90	100	110
重量 Weight	kg		90	100	210	390	520	560	450-600
使用压力 Pressure	mpa		40-380	40-380	40-380	40-380	40-380	40-380	40-380
适配吨位 Suitable excavator	ton		5-9	9-11	11-18	18-24	24-36	36-40	40-48